
SPECIFICATION GUIDE



TRACK ACCESS MATTING SYSTEM (TAMS)

The TAMS – Track Access Matting System provides easy access and egress, to and from rail digs. Quick to install and easy to relocate, the TAMS system enables longer working time in track possessions.

The four-part interlocking system is quick and easy for a team of four to install following simple site preparation. Whilst also protecting both the rail head and RRV's from damage. Suitable with wheeled and tracked RRV's.

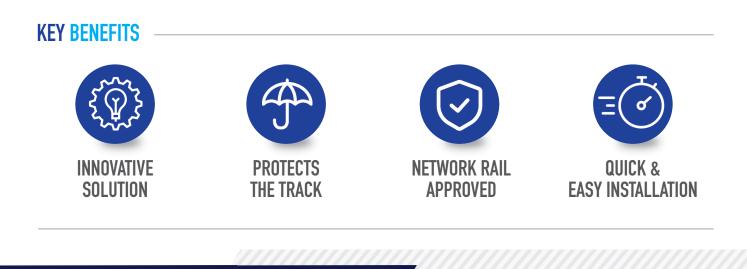

For more information visit www.vp-tpa.com or call 0370 240 2381

ENQUIRE NOW

TAMS – TRACK ACCESS MATTING SYSTEM

SPECIFICATIONS

>>	Description	Dimensions (m)
	Standard Track Access Matting System	
	Lower Ramp x 2	2
	Upper Ramp x 2	3
	Expansion Pack	
	Extension Ramp x 2	3

(Platform sections for plant unable to raise/lower rail bogies independently)

INSTALLATION TIME

- >> The TAMS can be fully installed and ready for use in less than 15 minutes
- >> Easily transported to and from the access point









For more information visit www.vp-tpa.com or call 0370 240 2381

